



S059 - Full Glass Door

COMPACT RANGE

*Flush-fitting and space-saving
guaranteed!*

Cabinets that meet all your space-saving requirements

Two functions: maturing or serving

Five types of doors for a cabinet to suit any interior



*Recommended by John Euvrard
Meilleur Ouvrier de France – Wine waiting*

EUROCAVE[®]

Your wine close at hand!

In the free-standing version, cabinets in the Compact range ideally meet your space-saving requirements, thanks to their specific dimensions.

In the flush-fitting version, they fit in perfectly in your kitchen.

2 capacities, 2 functions, 5 types of doors



V or S059 - Nero
Small capacity
56 bottles - Solid door



V or S059 - Nero
Small capacity
38 bottles - Full Glass door



V or S259 - Nero
Large capacity
66 bottles – Glass door



V or S259 - Nero
Large capacity
167 bottles - Silver glass door



V or S259 - Nero
Large capacity
118 bottles - Full Glass door



V259 - Full Glass Door

The large model of the flush-fitting cabinet requires an air-venting system to be installed at the back

Available in maturing or serving version, cabinets in the Compact range can hold from 38 bottles (small model) to 167 bottles (large model). Style has not been overlooked since cabinets in the Compact range can be adapted to suit your kitchen’s decor. Five types of doors are available: solid, silver, silver glass, Full Glass and technical.


EuroCave technology



- “Twin Process” technology: Temperature controlled to the nearest 10th of a degree.
- Exclusive humidity management: Humidity levels automatically monitored.
- Constant monitoring of your wine: Alarms to guarantee peace of mind.

Specific dimensions to meet your space-saving requirements

The small version is ideally suited to the flush-fitting requirements of kitchen designers and was designed to be placed under a work top, thanks to the front-vented system.

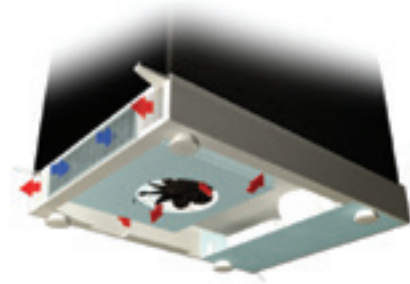

Outstanding flexibility!

Arrange, store, display



Sliding shelves



Display shelves



Storage shelves

Structure in two materials to absorb vibrations and protect your bottles.



Main du Sommelier

Technical features

Ref.	Dimensions HxWxD (mm)	Weight when empty (kg) Solid door	Mixed layout capacity** Sliding and storage	Sliding layout capacity**	Maximum capacity**	Permitted temp. range Ext.temp. min./max.	Consumption per 24hrs* (kWh)	Production of cold air
1 temperature								
V059	830x595x570	42	47	38	56	0°C/35°C	0,39	Dynamic condenser
V259	1790x595x585	65	164	118	167	0°C/35°C	0,44	Static condenser
Multi-temperature								
S059	830x595x570	40	-	38	56	12°C/30°C	0,39	Static condenser
S259	1790x595x585	63	-	118	167	12°C/30°C	0,44	Static condenser

* Consumption per 24 hrs measured with an external temperature of 25 °C and a solid door.

** Cabinet capacities are calculated using traditional Bordeaux bottles

Power consumption data

Model	Type of door	Energy efficiency rating	Annual power consumption Apc* (Kwh/yr)	Useful volume (litres)	Temperature of other compartments**	Sound emission (db(A))
V059	Solid	A	143	111	-	42
V059	Glass	C	219	111	-	42
V059	Technical	B	183	111	-	42
V259	Solid	A	143	318	-	37
V259	Glass	C	219	318	-	37
V259	Technical	B	183	318	-	37
S059	Solid	A	143	119	-	42
S059	Glass	C	219	119	-	42
S059	Technical	B	183	119	-	42
S259	Solid	A	143	325	-	37
S259	Glass	C	219	325	-	37
S259	Technical	B	183	325	-	37

* Power consumption calculated based on the result obtained over 24 hrs in standard test conditions (25°C). Actual power consumption depends on operating conditions and the location of the appliance. This appliance is designed solely for storing wine. – Category for all models: 2 – Climate class: Our appliances are designed to be used at an ambient temperature of 10°C - 32°C. (SN class).

** Red serving temperature

Control

1 Temp.: Electronic control from 5 - 22°C

Multi-Temp.: Electronic control from 5 - 22°C

(5 - 12°C for the bottom and 15 - 22°C for the top)

Internal setting

Electronic display

Internal display

Fault alarms

Hot/cold technologies - Insulation

Production of cold air: Static cold air - Compressor

Production of warm air: Heater

Heat activation: Automatic – Cut-off: adjustable

Power cords: EC/US/UK/JA/AU/CH/CN

Type of walls: aluminium panels

Type of external covering: Melamine panels HDF (High Density Fibre)

Type of insulation: Polyurethane foam

Equipment

Interior lighting (3 lighting options)

Active charcoal filter

Adjustable feet

Lock

U.V. protection and thermal insulation